

HAAS+SOHN

0426617121400d

Technical sheet for fireplace stoves
Orsted

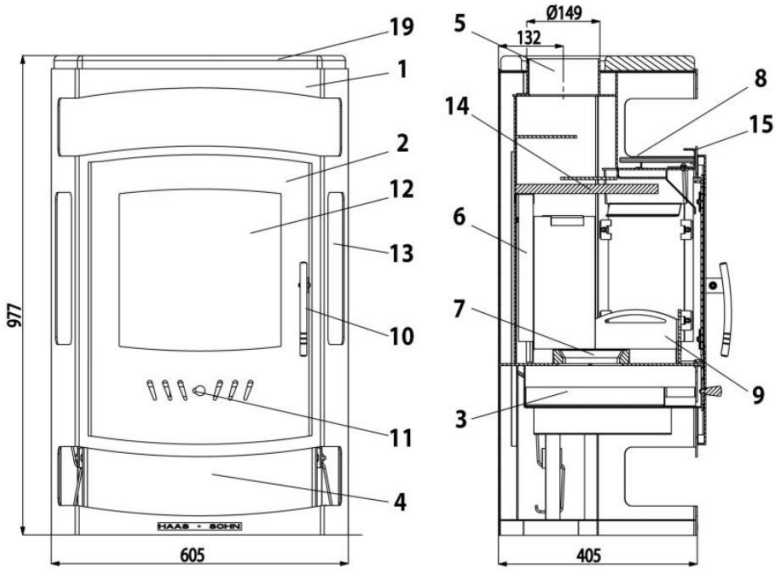

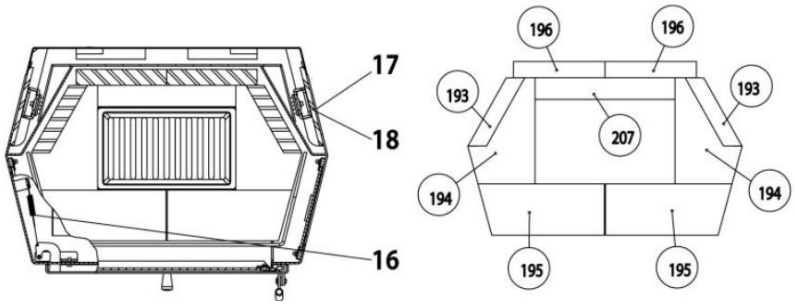

Suitable fuel:
For the use of suitable fuel, refer to chapter 2.2 Fuel in the General Operating Instructions.

Correct operation:
For correct and safe handling of the stove, please refer to chapters: 2. Description of the combustion process and 5. Operating instructions in the General Operating Instructions.

Item number	Fireclay number	Dimension
0050101930005	193	300x158x30
0050101940005	194	196x125x30
0050101950005	195	235x95x30
0050101960005	196	300x70x30
0050102070005	207	260x40x30

Fuel	Maximum fuel quantity	Primary air regulator (pos. 11 – inlet under the grate)	Secondary air regulator (pos. 15, upper)
Wooden logs	3 logs (approx. 2 – 2.5 kg)	Open 100% for 1 minute, then close	Open 100%

Item number	Pos.	Name	Item number	Pos.	Name
	1 -	Stove body	0426618105304	11 -	Primary air regulator
0426617006300	2 -	Firebox door	0426618105302	12 -	Heat-resistant glass 350 x 350
0427715006600	3 -	Ash pan 285 x 285	0426618105001	13 -	Side glass 330 x 159
	4 -	Space for wood	050500470005	14 -	Aperture 526 x 290 x 25
	5 -	Flue outlet		15 -	Secondary air regulator
	6 -	Fireclay	0089000320005	16 -	Door spring
0429415005005	7 -	Grate	0063000012705	17 -	Side cladding large ST 330 x 150
0063000031205	8 -	Heater cover right+left	0063000012605	18 -	Side cladding small 220 x 150
0426617005500	9 -	Side barrier 187 x 110	0040008080005	19 -	ST lid
0426618106500	-	Anti-skid 463x110	0041012120005		Door seal 12 mm (2100 mm)
0081020010005	10 -	Handle handle	0040210040005		Glass seal 10x4 mm (1400 mm)
			0040208020006		Glass holder gasket 8x2 mm (100 mm)

Technical data:		Orsted		
Height	977 mm	Average flue gas temperature behind the flue gas neck		300 °C
Width	605 mm	Minimum chimney draft		12 Pa
Depth without handle	405 mm	Minimum chimney draft at 0.8 times the rated output		10 Pa
Weight	120 kg	Mass flow rate of dry flue gas		8,7 g/s
Flue pipe neck	150 mm	Fuel	Wood	
Rated thermal output	8 kW	CO2	8,6 %	
Performance range	2,9 – 8,7 kW	Energy efficiency	78,5 %	


Certificate: RRF- 40 08 1783


Machine translation – not reviewed.
Unchanged original at the end.


HAAS+SOHN


0426617121400d

Technický list pro krbová kamna Orsted

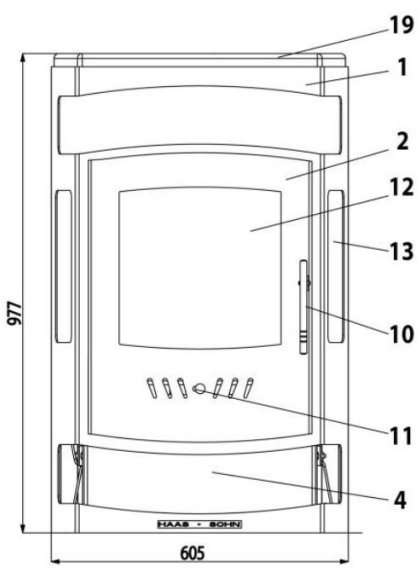

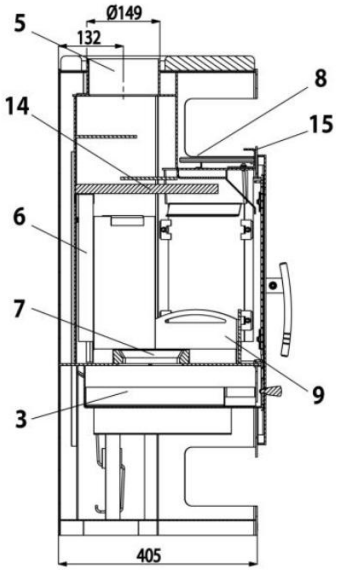

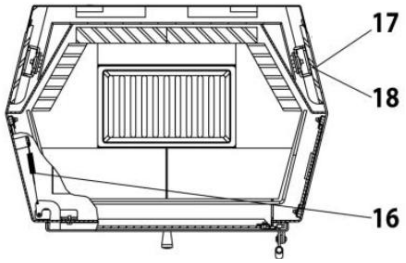

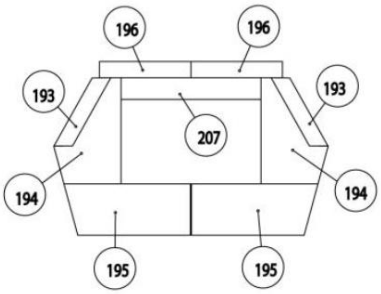

Vhodné palivo:
Pro používání vhodného paliva nahlédněte do kapitoly **2.2 Palivo** ve Všeobecném návodu k obsluze.

Správný provoz:
Pro správné a bezpečné zacházení s krbovými kamny nahlédněte do kapitol: **2. Popis spalovacího procesu** a **5. Návod k obsluze** ve Všeobecném návodu k obsluze

Číslo zboží	Číslo šamotu	Rozměr
0050101930005	193	300x158x30
0050101940005	194	196x125x30
0050101950005	195	235x95x30
0050101960005	196	300x70x30
0050102070005	207	260x40x30

Palivo	Maximální množství paliva	Regulátor primárního vzduchu (poz. 11 – přívod pod rošt)	Regulátor sekundárního vzduchu (poz. 15, horní)
Dřevěná polena	3 polena (cca 2 – 2,5 kg)	1 minutu otevřít 100%, pak zavřít	Otevřeno 100%

Číslo zboží	Poz.	Název	Číslo zboží	Poz.	Název
	1 -	Těleso kamen	0426618105304	11 -	Regulátor primárního vzduchu
0426617006300	2 -	Dvířka topeniště	0426618105302	12 -	Žáruvzdorné sklo 350x350
0427715006600	3 -	Popelník 285x285	0426618105001	13 -	Boční sklo 330x159
	4 -	Prostor pro dřevo	050500470005	14 -	Clona 526x290x25
	5 -	Vývod kouřovodu		15 -	Regulátor sekundárního vzduchu
	6 -	Šamot	0089000320005	16 -	Pružina dvířek
0429415005005	7 -	Rošt	0063000012705	17 -	Boční obklad velký ST 330x150
0063000031205	8 -	Obklad pícky pravý+levý	0063000012605	18 -	Boční obklad malý 220x150
0426617005500	9 -	Zábrana boční 187x110	0040008080005	19 -	Víko ST
0426618106500	-	Zábrana pření 463x110	0041012120005		Těsnění dvířek 12 mm (2100 mm)
0081020010005	10 -	Madlo kliky	0040210040005		Těsnění skla 10x4 mm (1400 mm)
			0040208020006		Těsnění držáků skla 8x2 mm (100 mm)

Technická data:		Orsted		
Výška	977 mm	Prům. teplota spalin za hrdlem kouřovodu		300 °C
Šířka	605 mm	Minimální tah komína		12 Pa
Hloubka bez kliky	405 mm	Minimální tah komína při 0,8-násobku jmenovitého výkonu		10 Pa
Hmotnost	120 kg	Hmotnostní průtok suchých spalin		8,7 g/s
Hrdlo kouřovodu	150 mm	Palivo	Dřevo	
Jmenovitý tepelný výkon	8 kW	CO2	8,6 %	
Rozsah výkonů	2,9 – 8,7 kW	Energetická účinnost	78,5 %	

Certifikát: RRF-40 08 1783