

Adria mini II
0431715010000

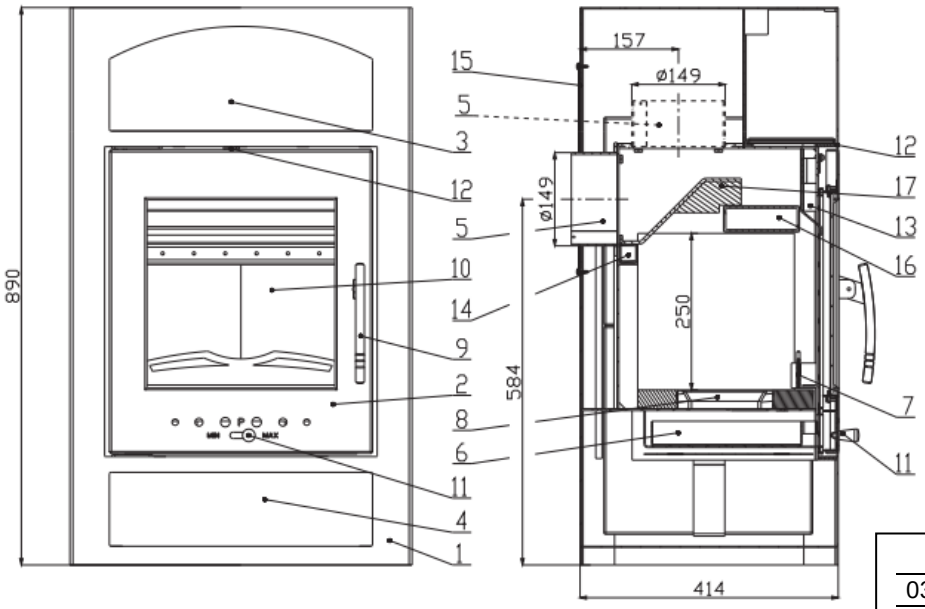



Suitable fuels:
For the use of suitable fuel, see chapter 2.2 Fuel in general operating instructions.

Correct operation:
For proper and safe handling of fireplace stoves, please refer to the following chapters:
2. Description of the combustion process and 5. Operating instructions in general operating instructions.

Item number	Position	Dimension
0331415005501	1	30x220x230
0331415005502	2	30x61x260
0430815005501	3	30x62,5x276
0331415005504	4	30x250x275

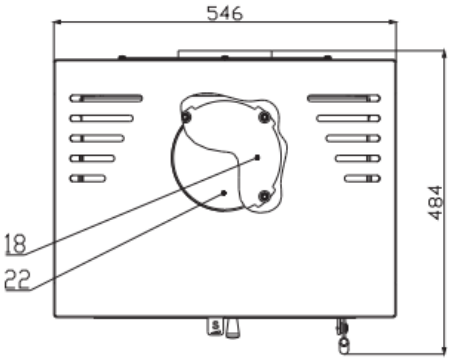






Fuel	Maximum fuel quantity	Primary air regulator (11) (Heating)	Secondary regulator air (12) (Heating)
Wooden logs	2-3 logs (2.4 kg)	Leave it open for about 10 minutes, then close	openly

Item number	Pos.	Name	Item number	Pos.	Name
-	1	Stove body	0331415005700	17	Aperture - free
0331415035300	2	Firebox door - black	0470315007002	18	Flue pipe plug
-	3	Oven	0431715406101	19	Left stove tile - beige
-	4	Wood storage	0431715406102	20	Tile of the right side - beige
0470315007007	5	Flue pipe neck	0061001000605	21	Side tile - beige
0433017005600	6	Ash pan	-	22	Knock-out plug
0431715005008	7	Barrier	0431715005144	23	Cover cap
0020100130005	8	Cast iron grate	-	and	Self-tapping screw M4.2x16 (2 pcs.)
0081020120005	9	Crank - Cr	-	b	Self-tapping screw M4.2x16 (8 pcs.)
0331415005304	10	Heat-resistant glass	-	C	M8 nuts (4 pcs)
0082020010005	11	Primary air regulator Cr			
0331415005009	12	Secondary air regulator			
-	13	Secondary air supply	0431715010000	Door sealing cord 10 mm (1930 mm)	
-	14	Tertiary air supply	0040208020006	Sealing cord for glass holders 8 x 2 mm (580 mm)	
0431715005122	15	Rear cover	0040710100005	Glass sealing cord 10 mm (1300 mm)	
-	16	Aperture - fixed	0040210040005	Flue pipe sealing cord 10 x 4 mm (600 mm)	

Machine translation – not reviewed.
Unchanged original at the end.

Technical data:	Wooden logs		
Achieved thermal output (100%)	8,2 kW	Height	890 mm
Reduced thermal output (33%)	2,7 kW	Width	546 mm
Rated thermal output	8 kW	Depth	414 mm
Fuel consumption	2,4 kg/h	Weight	95 kg
Average flue gas temperature after flue gas outlet	408,5 °C	Flue diameter	150 mm
Mass flow rate of dry flue gas	7,3 g/s	Minimum chimney draft	12 Pa
Energy efficiency	78,1 %	Heating capacity (average heat loss) at 8.2 kW	approx. 148 m3
Average CO2 concentration	9,7 %	Adjustable power	2,5 – 8,2 kW
CO concentration in flue gas at 13% O2	919 mg/Nm^3		
Dust at 13% O2	39 mg/Nm^3		
Tested according to EN 13240			

DIMENSIONAL DIAGRAM OF STONE WITH INSTALLATION OF FLUE ELBOW AND PIPE Ø150/250 SUPPLIED AS SPECIAL ACCESSORIES

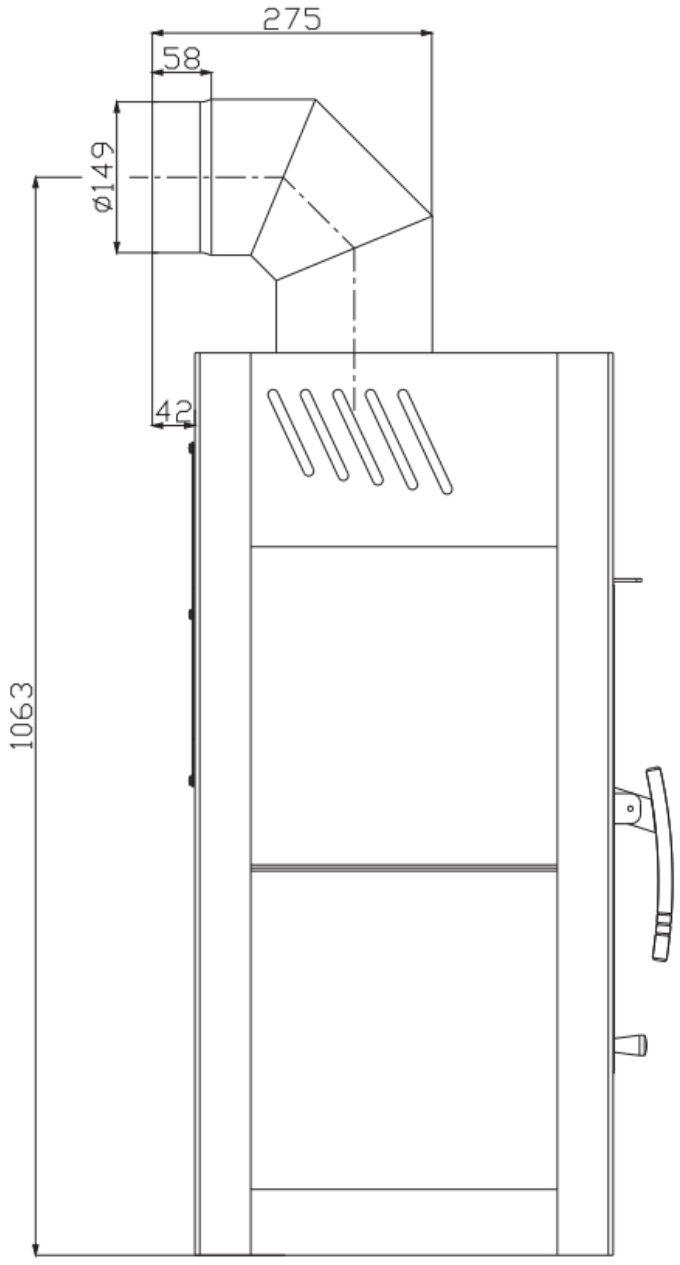


Machine translation – not reviewed.
Unchanged original at the end.

HAAS+SOHN

0431715011400g


Adria mini II
0431715010000

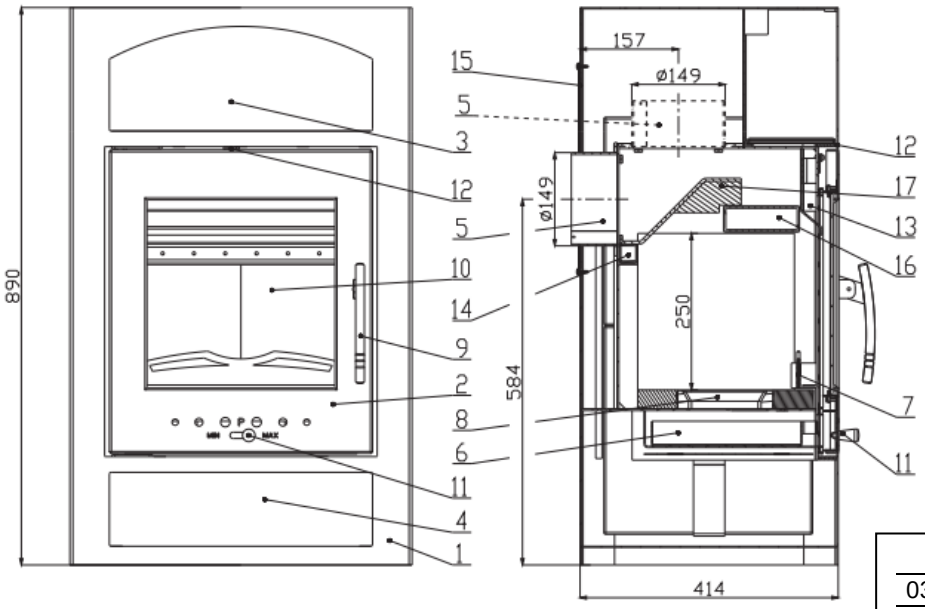



Vhodná paliva:
Pro používání vhodného paliva nahlédněte do kapitoly **2.2 Palivo** ve všeobecném návodu k obsluze.

Správný provoz:
Pro správné a bezpečné zacházení s krbovými kamny nahlédněte do kapitol:
2. Popis spalovacího procesu a **5. Návod k obsluze**
ve všeobecném návodu k obsluze.

Číslo zboží	Pozice	Rozměr
0331415005501	1	30x220x230
0331415005502	2	30x61x260
0430815005501	3	30x62,5x276
0331415005504	4	30x250x275

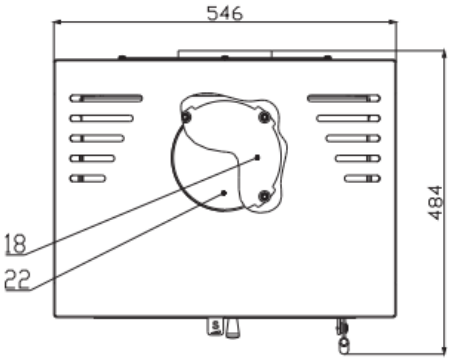






Palivo	Maximální množství paliva	Regulátor primárního vzduchu (11) (Zátop)	Regulátor sekundárního vzduchu (12) (Topení)
Dřevěná polena	2-3 polena (2,4 kg)	cca 10 minut nechat otevřené, potom zavřít	otevřené

Číslo zboží	Poz.	Název	Číslo zboží	Poz.	Název
-	1	Těleso kamen	0331415005700	17	Clona - volná
0331415035300	2	Dvířka topeniště - černá	0470315007002	18	Záslepka kouřovodu
-	3	Pícka	0431715406101	19	Dlaždice pícky levá - béžová
-	4	Zásobník na dřevo	0431715406102	20	Dlaždice pícky pravá - béžová
0470315007007	5	Hrdlo kouřovodu	0061001000605	21	Dlaždice boku - béžová
0433017005600	6	Popelník	-	22	Vylamovací záslepka
0431715005008	7	Zábrana	0431715005144	23	Záslepka krytu
0020100130005	8	Litinový rošt	-	a	Samořezný šroub M4,2x16 (2 ks)
0081020120005	9	Klika - Cr	-	b	Samořezný šroub M4,2x16 (8 ks)
0331415005304	10	Žáruvzdorné sklo	-	c	Matice M8 (4 ks)
0082020010005	11	Regulátor primárního vzduchu Cr			
0331415005009	12	Regulátor sekundárního vzduchu			
-	13	Přívod sekundárního vzduchu	0431715010000	Těsnící šňůra dveří 10 mm (1930 mm)	
-	14	Přívod terciárního vzduchu	0040208020006	Těsnící šňůra držáků skla 8x2 mm (580 mm)	
0431715005122	15	Zadní kryt	0040710100005	Těsnící šňůra skla 10 mm (1300 mm)	
-	16	Clona - pevná	0040210040005	Těsnící šňůra kouřovodu 10x4 mm (600 mm)	

Technická data:	Dřevěná polena		
Dosažený tepelný výkon (100%)	8,2 kW	Výška	890 mm
Snížený tepelný výkon (33%)	2,7 kW	Šířka	546 mm
Jmenovitý tepelný výkon	8 kW	Hloubka	414 mm
Spotřeba paliva	2,4 kg/h	Hmotnost	95 kg
Prům. teplota spalin za hrdl. kouřovodu	408,5 °C	Průměr kouřovodu	150 mm
Hmotnostní průtok suchých spalin	7,3 g/s	Minimální tah komína	12 Pa
Energetická účinnost	78,1 %	Vytápěcí schopnost (střední tep. ztráty) při 8,2 kW	cca 148 m^3
Průměrná koncetrace CO_2	9,7 %	Regulovatelný výkon	2,5 – 8,2 kW
Koncentrace CO ve spalinách při 13% O_2	919 mg/Nm^3		
Prach při 13% O_2	39 mg/Nm^3		
Zkoušeno dle EN 13240			

ROZMĚROVÉ SCHÉMA KAMEN S INSTALACÍ KOLENA ODTAHU SPALIN A TRUBKY Ø150/250 DODÁVANÝCH JAKO ZVLÁŠTNÍ PŘÍSLUŠENSTVÍ

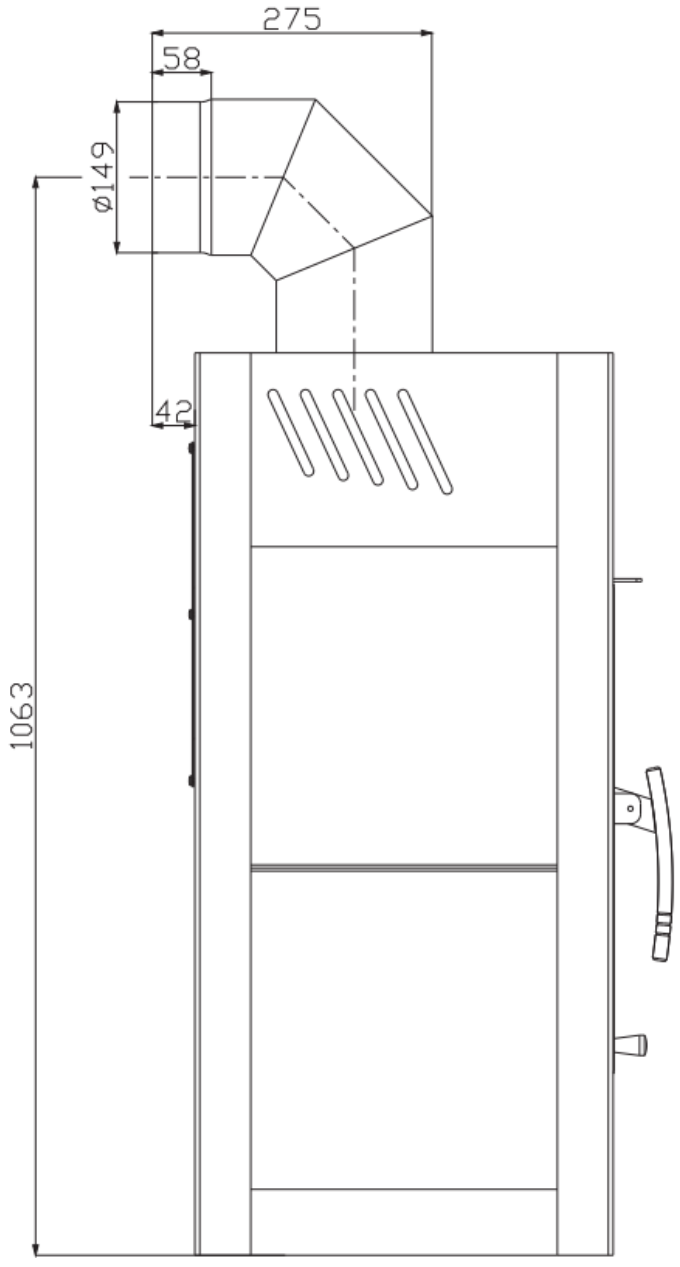

ZÁMĚNA VÝVODU KOUŘOVODU

