Machine translation – not reviewed.
Unchanged original at the end.

WE HEAT WITH WOOD

profikrby.cz®

NON-COMBUSTIBLE FIREPLACE MESH



Non-combustible Profikrby fireplace reinforcing mesh for radiant fireplace constructions and all fireplace and stove applications requiring stability and resistance at elevated temperatures.

Profikrby fireplace mesh is used to build:

- fireplace and stove inserts
- built-in stoves and cookers

Profikrby fireplace mesh contains flame retardants and, unlike other meshes used in stove construction, produces no smoke when heated to high temperatures!


Due to its classification temperature and resistance to the aggressive behavior of special stove plasters, it is especially suitable for modern radiant fireplace surrounds, where it does not release any substances and does not degrade, even in close proximity to the fireplace insert frame.

Radiant fireplace structures and storage structures that are thermally stressed and at the same time the perlinka must resist chemicals in stove adhesives and plasters.

The Profikrby mesh has a highly resistant fibre surface that withstands these effects.

PARAMETERS:

Composition	Glass fiber mesh fabric with PVDC-based finish
Approximate mesh size	3,5 x 3,8 mm
Thickness	0,52 mm
Weight per unit area	160 g/m²
Product use	fireplaces, stoves, construction
Roll length	50 m
Roll width	1000 mm
Temperature resistance	500 °C
Storage temperature	-10 to +50 °C
Features	High mechanical strength, dimensional stability, compatible with all fireplace and facade materials

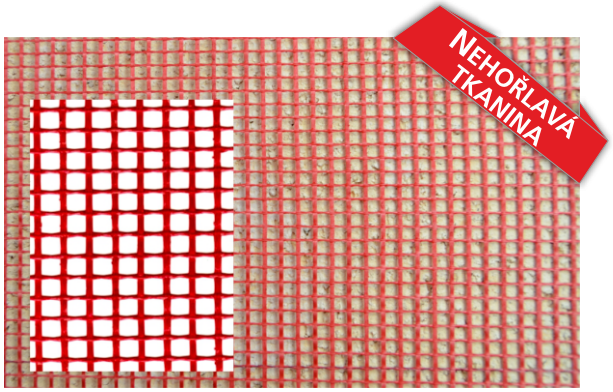

Profikrby sro Svitavská 500 / 7 , 678 01 Blansko, e-mail: obchod@profikrby.cz, tel.: 516 410 252

TOPÍME DŘEVEM

profikrby.cz®

KRBAŘSKÁ NEHOŘLAVÁ PERLINKA



Nehořlavá krbařská perlinka profikrby vhodná pro sálavé stavby krbů a všechny krbařské a kamnářské aplikace kde je potřeba stabilita a odolnost za vyšších teplot.

Krbařská perlinka Profikrby je určena při stavbě:

- krbových a kamnových vložek
- stavěných kamen a sporáků

Krbařská perlinka profikrby obsahuje retardéry hoření a proto na rozdíl od ostatních perlinek v kamnářské praxi po zahřátí na vysokou teplotu neprodukuje žádný dým!


Vzhledem ke své klasifikační teplotě a odolnosti vůči agresivnímu chování speciálních kamnářských omítek je předurčena obzvláště pro moderní sálavé krbové obestavby, kde se z ní i v těsné blízkosti rámu krbové vložky nevylučují žádné látky a nedegraduje.

Sálavé stavby krbů a akumulační stavby, které jsou tepelně namáhané a současně perlinka musí odolávat chemickým látkám v kamnářských lepidlech a omítkách.

Krbařská perlinka profikrby má velmi odolnou povrchovou úpravu vláken, proti těmto vlivům.

PARAMETRY:

Složení výrobku	Sklovláknitá mřížková tkanina s apreturou na bázi PVDC
Přibližná světlost ok	3,5 x 3,8 mm
Tloušťka	0,52 mm
Plošná hmotnost	160 g/m²
Použití výrobku	krby, kamna, stavebnictví
Délka role	50 m
Šířka role	1000 mm
Teplotní odolnost	500 °C
Skladovací teplota	-10 až + 50 °C
Vlastnosti	Vysoká mechanická pevnost, rozměrová stabilita, kompatibilní se všemi krbařskými a fasádními materiály

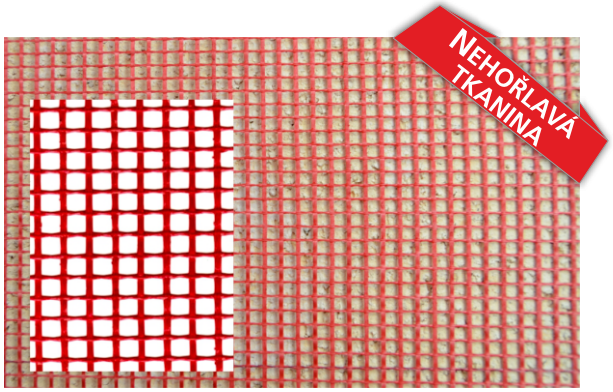

Profikrby s.r.o. Svitavská 500/7, 678 01 Blansko, e-mail: obchod@profikrby.cz, tel.: 516 410 252