Product data sheet (en)

Fireplace inserts Type: 328

Machine translation. Technical review pending.
Complete unchanged original at the end. Translation is not manufacturer-approved.

YORK TO I.

Technical parameters

328 YOA

Performance

Nominal heat output (kW) / Adjustable heat output (kW)	7,0 / 3,5 - 9,0

Dimensions

Height (1) x Width (2) x Depth (3) (mm)	663 x 539 x 451
Internal dimensions of the firebox (w x h x d) / Maximum length of logs (mm)	380 x 325 x 265 / 340

Weight according to trim

without lining (kg)	80

Air

Central air inlet (7) / diameter (mm) / throat included in the stove	yes / Ø 100 / no
Secondary air control / Primary air control / Tertiary air supply	yes / no / yes
Automatic air supply control	No
Height of the central air intake axis from the floor (8) (mm)	93
Distance from the axis of the central air intake to the rearmost part of the product (8.1) (mm)	82
Air heat loss Vh (m3/hour)	≤ 1,5

Parameters

Product classification	Type BE
Fuel: wood / wood briquettes [D / DB]	
Permissible fuel consumption at rated output (kg/hour) [D / DB]	2,1 / 2,1
Heated space (m3)	70 - 180
Energy efficiency (%) [D / DB]	81,3 / 81,3
Seasonal energy efficiency ηs (%)	71,3
Energy Efficiency Index EEI / Energy Efficiency Class	108 / A+
Minimum chimney draft (Pa)	12
Flue gas outlet temperature (°C) [D / DB]	284 / 284
Flue gas mass flow (g/s) [D / DB]	6,9 / 6,9
CO concentration at 13% O2 (mg/Nm3) [D / DB]	1174 / 1174
NOx concentration at 13% O2 (mg/Nm3) [D / DB]	92 / 92
OGC concentration at 13% O2 (mg/Nm3) [D / DB]	71 / 71
Dust concentration at 13% O2 (mg/Nm3) [D / DB]	36 / 36
Multiple door closing	No
Intermittent operation (INT) / Continuous operation (NOC)	INT

Flue


Flue connection (4)	top / rear
Flue pipe diameter (mm)	Ø 150
Height of the rear flue axis from the floor (5) (mm)	515
Distance from the axis of the upper flue to the rearmost part of the product (6) (mm)	171
Chimney temperature class	T 400 G
Maximum chimney load mchim (kg)	-
Connection to a common chimney	No


Exams


EN 16510-1	Yes
EN 16510-2-2	Yes
I. BImSchV Level 2	Yes
ECODESIGN	Yes


Minimum clearance distances from flammable materials

Ceiling dC (mm)	>750
Part in front of the glass dP (mm)	800
Floor in front dF (mm)	0
Floor bottom dB (mm)	0
Lateral radiation area dL (mm)	400
Side part dS1 / dS2 / dS3 (mm)	200 / 200 / 200
Side part dS (mm)	200
Rear part dR (mm)	200
Minimum distance from walls made of non-combustible materials dnon (mm)	50

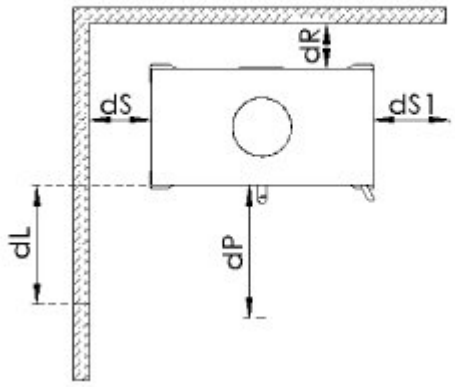

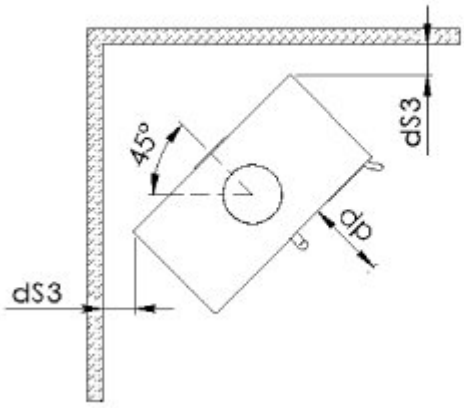


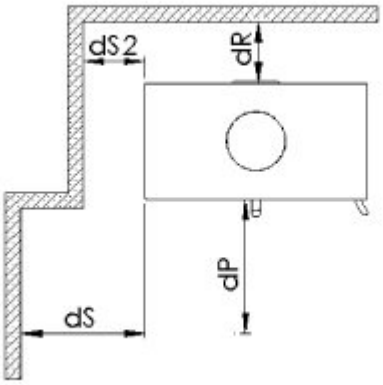

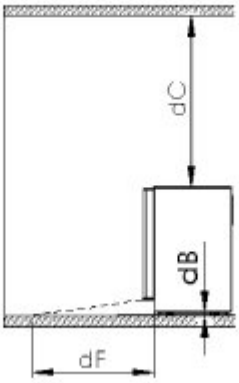

Machine translation. Technical review pending.
Complete unchanged original at the end. Translation is not manufacturer-approved.

Dimensional sketch

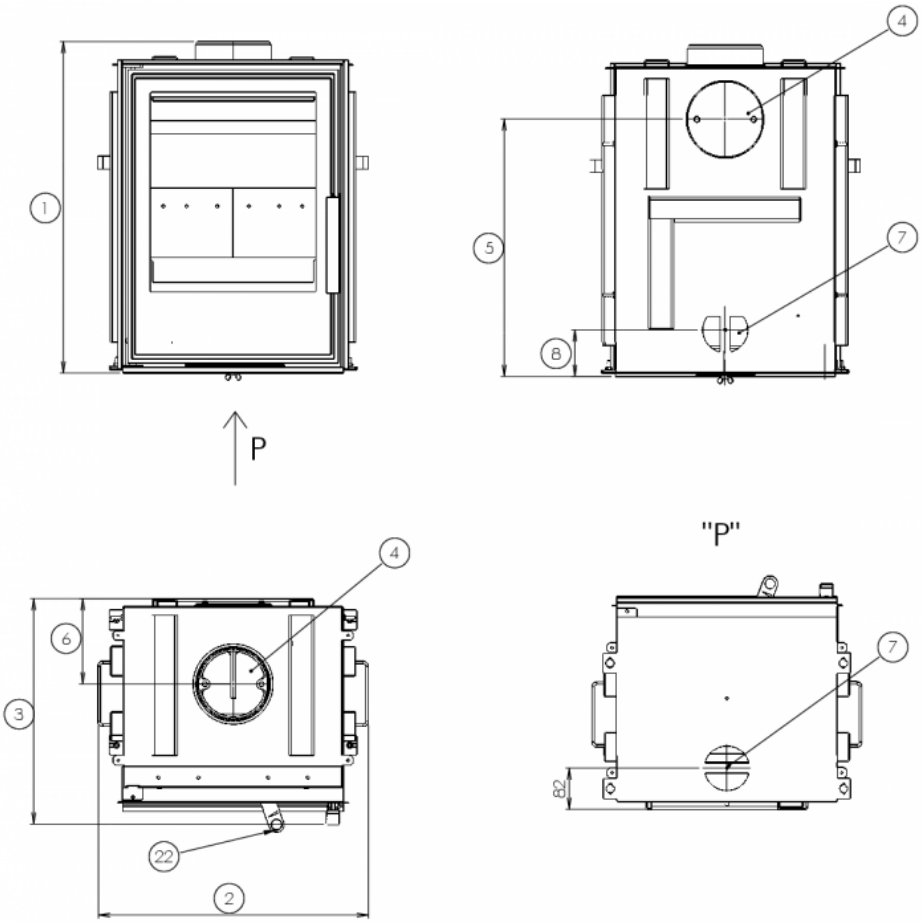


Additional information

1	height	663 mm
2	width	539 mm
3	depth	451 mm
4	flue	Ø 150 mm
5	height of the rear flue axis from the floor	515 mm
6	distance from the axis of the upper flue to the rearmost part of the product	171 mm
7	central air supply	Ø 100 mm
8	height of the central air intake axis from the floor	93 mm
8.1	distance from the axis of the central air intake to the rearmost part of the product	82 mm
22	burning intensity control - right open	

Machine translation. Technical review pending.
Complete unchanged original at the end. Translation is not manufacturer-approved.

Product control

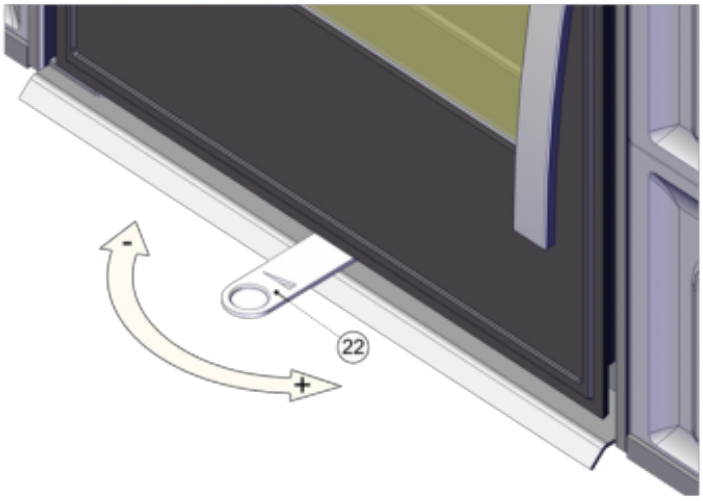

Heating with wood and wood briquettes

Regulate the power only by controlling the burning intensity.

Manufacturer: ABX, spol. s r.o., Žitná 1091/3, 408 01 Rumburk, Czech Republic

phone: 412 332 523, 412 333 614, fax: 412 333 521, e-mail: info@abx.cz, website: www.abx.cz

Service: ABX s r.o., Plynární 1518/12, 408 01 Rumburk, tel.: 412 372 147, fax: 412 375 113, e-mail: reklamacie@abx.cz

As of: 14.4.2026

Machine translation. Technical review pending.
Complete unchanged original at the end. Translation is not manufacturer-approved.

Technický list výrobku (cs)

Krbové vložky Typ: 328

YORK K I.



Technický list výrobku (cs)

Krbové vložky Typ: 328

YORK K I.

Technické parametry


	328 YOA
Výkon	
Jmenovitý tepelný výkon (kW) / **Regulovatelný tepelný výkon** (kW)	7,0 / 3,5 - 9,0
Rozměry	
Výška (1) x **Šířka** (2) x **Hloubka** (3) (mm)	663 x 539 x 451
Vnitřní rozměr topeniště (š x v x h) / **Maximální délka polen** (mm)	380 x 325 x 265 / 340
Hmotnost podle obložení	
bez obložení (kg)	80
Vzduch	
Centrální přívod vzduchu (7) / **průměr** (mm) / **hrdlo součástí kamen**	ano / Ø 100 / ne
Ovládání sekundárního vzduchu / **Ovládání primárního vzduchu** / **Terciární přívod vzduchu**	ano / ne / ano
Automatická regulace přívodu vzduchu	ne
Výška osy centrálního přívodu vzduchu od podlahy (8) (mm)	93
Vzdálenost osy centrálního přívodu vzduchu k nejzadnější části výrobku (8.1) (mm)	82
Tepelná ztráta vzduchu V_h (m^3/hod)	≤ 1,5
Parametry	
Klasifikace výrobku	Typ BE
Palivo: dřevo / dřevěné brikety [*D / DB*]	
Spotřeba přípustného paliva při jmenovitém výkonu (kg/hod) [*D / DB*]	2,1 / 2,1
Vytápěný prostor (m^3)	70 - 180
Energetická účinnost (%) [*D / DB*]	81,3 / 81,3
Sezónní energetická účinnost η_s (%)	71,3
Index energetické účinnosti EEI / **Třída energetické účinnosti**	108 / A+
Minimální tah komína (Pa)	12
Výstupní teplota spalin (°C) [*D / DB*]	284 / 284
Hmotnostní tok spalin (g/s) [*D / DB*]	6,9 / 6,9
Koncentrace CO při 13 % O_2 (mg/Nm^3) [*D / DB*]	1174 / 1174
Koncentrace NO_x při 13 % O_2 (mg/Nm^3) [*D / DB*]	92 / 92
Koncentrace OGC při 13 % O_2 (mg/Nm^3) [*D / DB*]	71 / 71
Koncentrace prachu při 13 % O_2 (mg/Nm^3) [*D / DB*]	36 / 36
Vícenásobné zavírání dvířek	ne
Přerušovaný provoz (INT) / Nepřetržitý provoz (NOC)	INT
Kouřovod	
Připojení kouřovodu (4)	horní / zadní
Průměr kouřovodu (mm)	Ø 150
Výška osy zadního kouřovodu od podlahy (5) (mm)	515
Vzdálenost osy horního kouřovodu k nejzadnější části výrobku (6) (mm)	171
Teplotní třída komínu	T 400 G
Maximální zatížení komínu m_{chim} (kg)	-
Připojení na společný komín	ne


Zkoušky


ČSN EN 16510-1	ano
ČSN EN 16510-2-2	ano
I. BImSchV Stufe 2	ano
EKODESIGN	ano


Minimální odstupové vzdálenosti od hořlavých materiálů

Strop d_C (mm)	>750
Část před sklem d_P (mm)	800
Podlaha v přední části d_F (mm)	0
Podlaha spodní část d_B (mm)	0
Boční oblast sálání d_L (mm)	400
Boční část d_{S1} / d_{S2} / d_{S3} (mm)	200 / 200 / 200
Boční část d_S (mm)	200
Zadní část d_R (mm)	200
Minimální vzdálenost od stěn z nehořlavých materiálů d_{non} (mm)	50

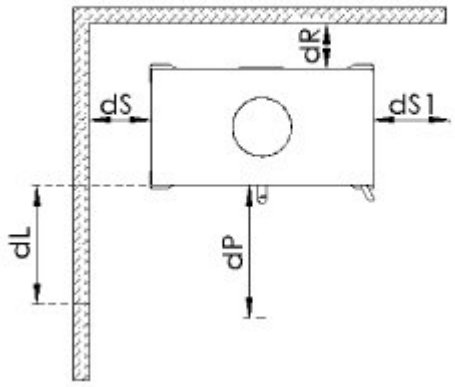


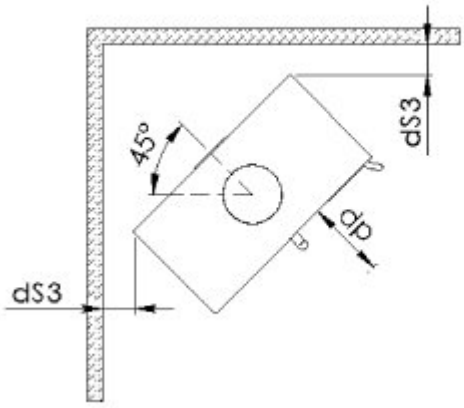

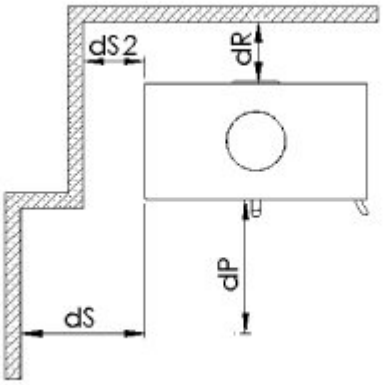

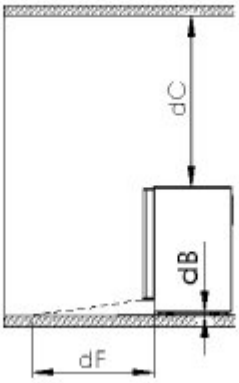


Rozměrový náčrt

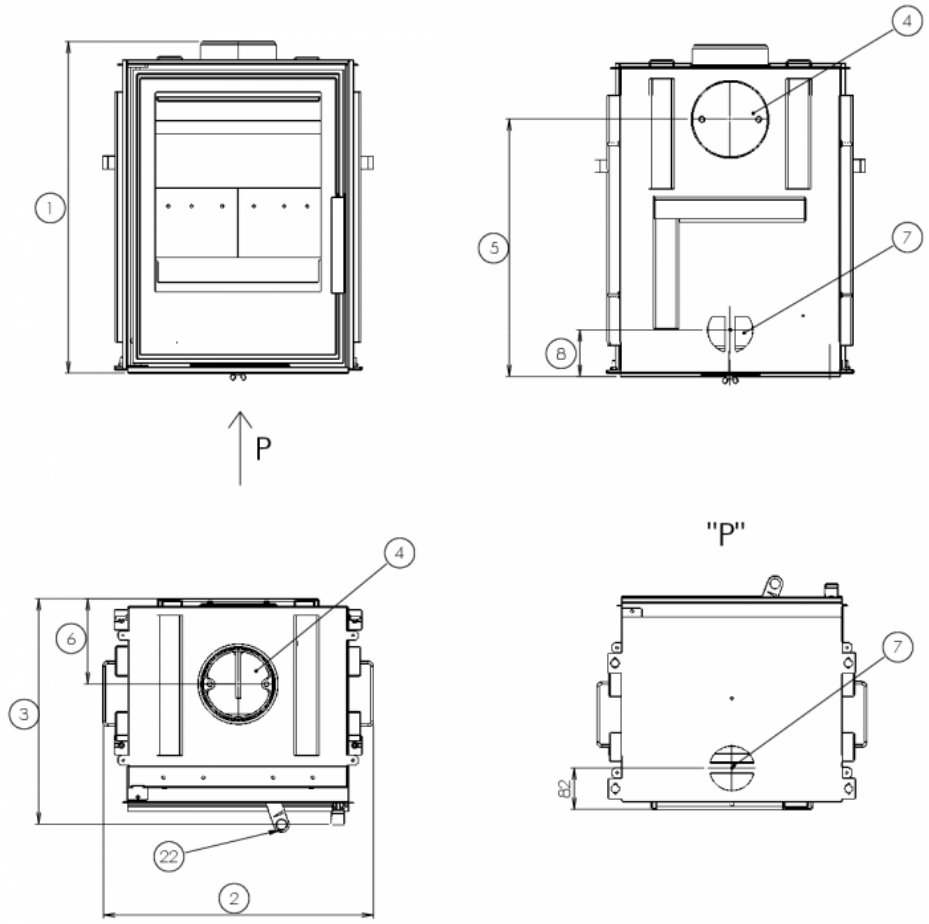

Doplňující informace

1	výška	663 mm
2	šířka	539 mm
3	hloubka	451 mm
4	kouřovod	Ø 150 mm
5	výška osy zadního kouřovodu od podlahy	515 mm
6	vzdálenost osy horního kouřovodu k nejzadnější části výrobku	171 mm
7	centrální přívod vzduchu	Ø 100 mm
8	výška osy centrálního přívodu vzduchu od podlahy	93 mm
8.1	vzdálenost osy centrálního přívodu vzduchu k nejzadnější části výrobku	82 mm
22	ovládání intenzity hoření - vpravo otevřeno	

Ovládání produktu

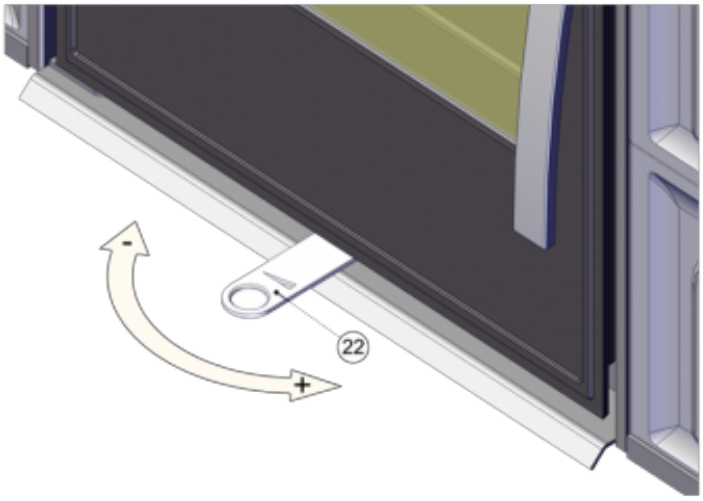

Topení dřevem a dřevěnými briketami

Výkon regulujte jen pomocí ovládání intenzity hoření.

Výrobce: ABX, spol. s r.o., Žitná 1091/3, 408 01 Rumburk, Česká republika

tel.: 412 332 523, 412 333 614, fax: 412 333 521, e-mail: info@abx.cz, web: www.abx.cz

Servis: ABX s r.o., Plynární 1518/12, 408 01 Rumburk, tel.: 412 372 147, fax: 412 375 113, e-mail: reklamace@abx.cz

Stav ke dni: 14.4. 2026